


Further evolution

*"Miniature Type Linear Way" series meeting
the next-generation needs.
World-smallest size model with a track rail width of 7 mm
has been introduced!*

EIHE® Linear Way L
LWL.....

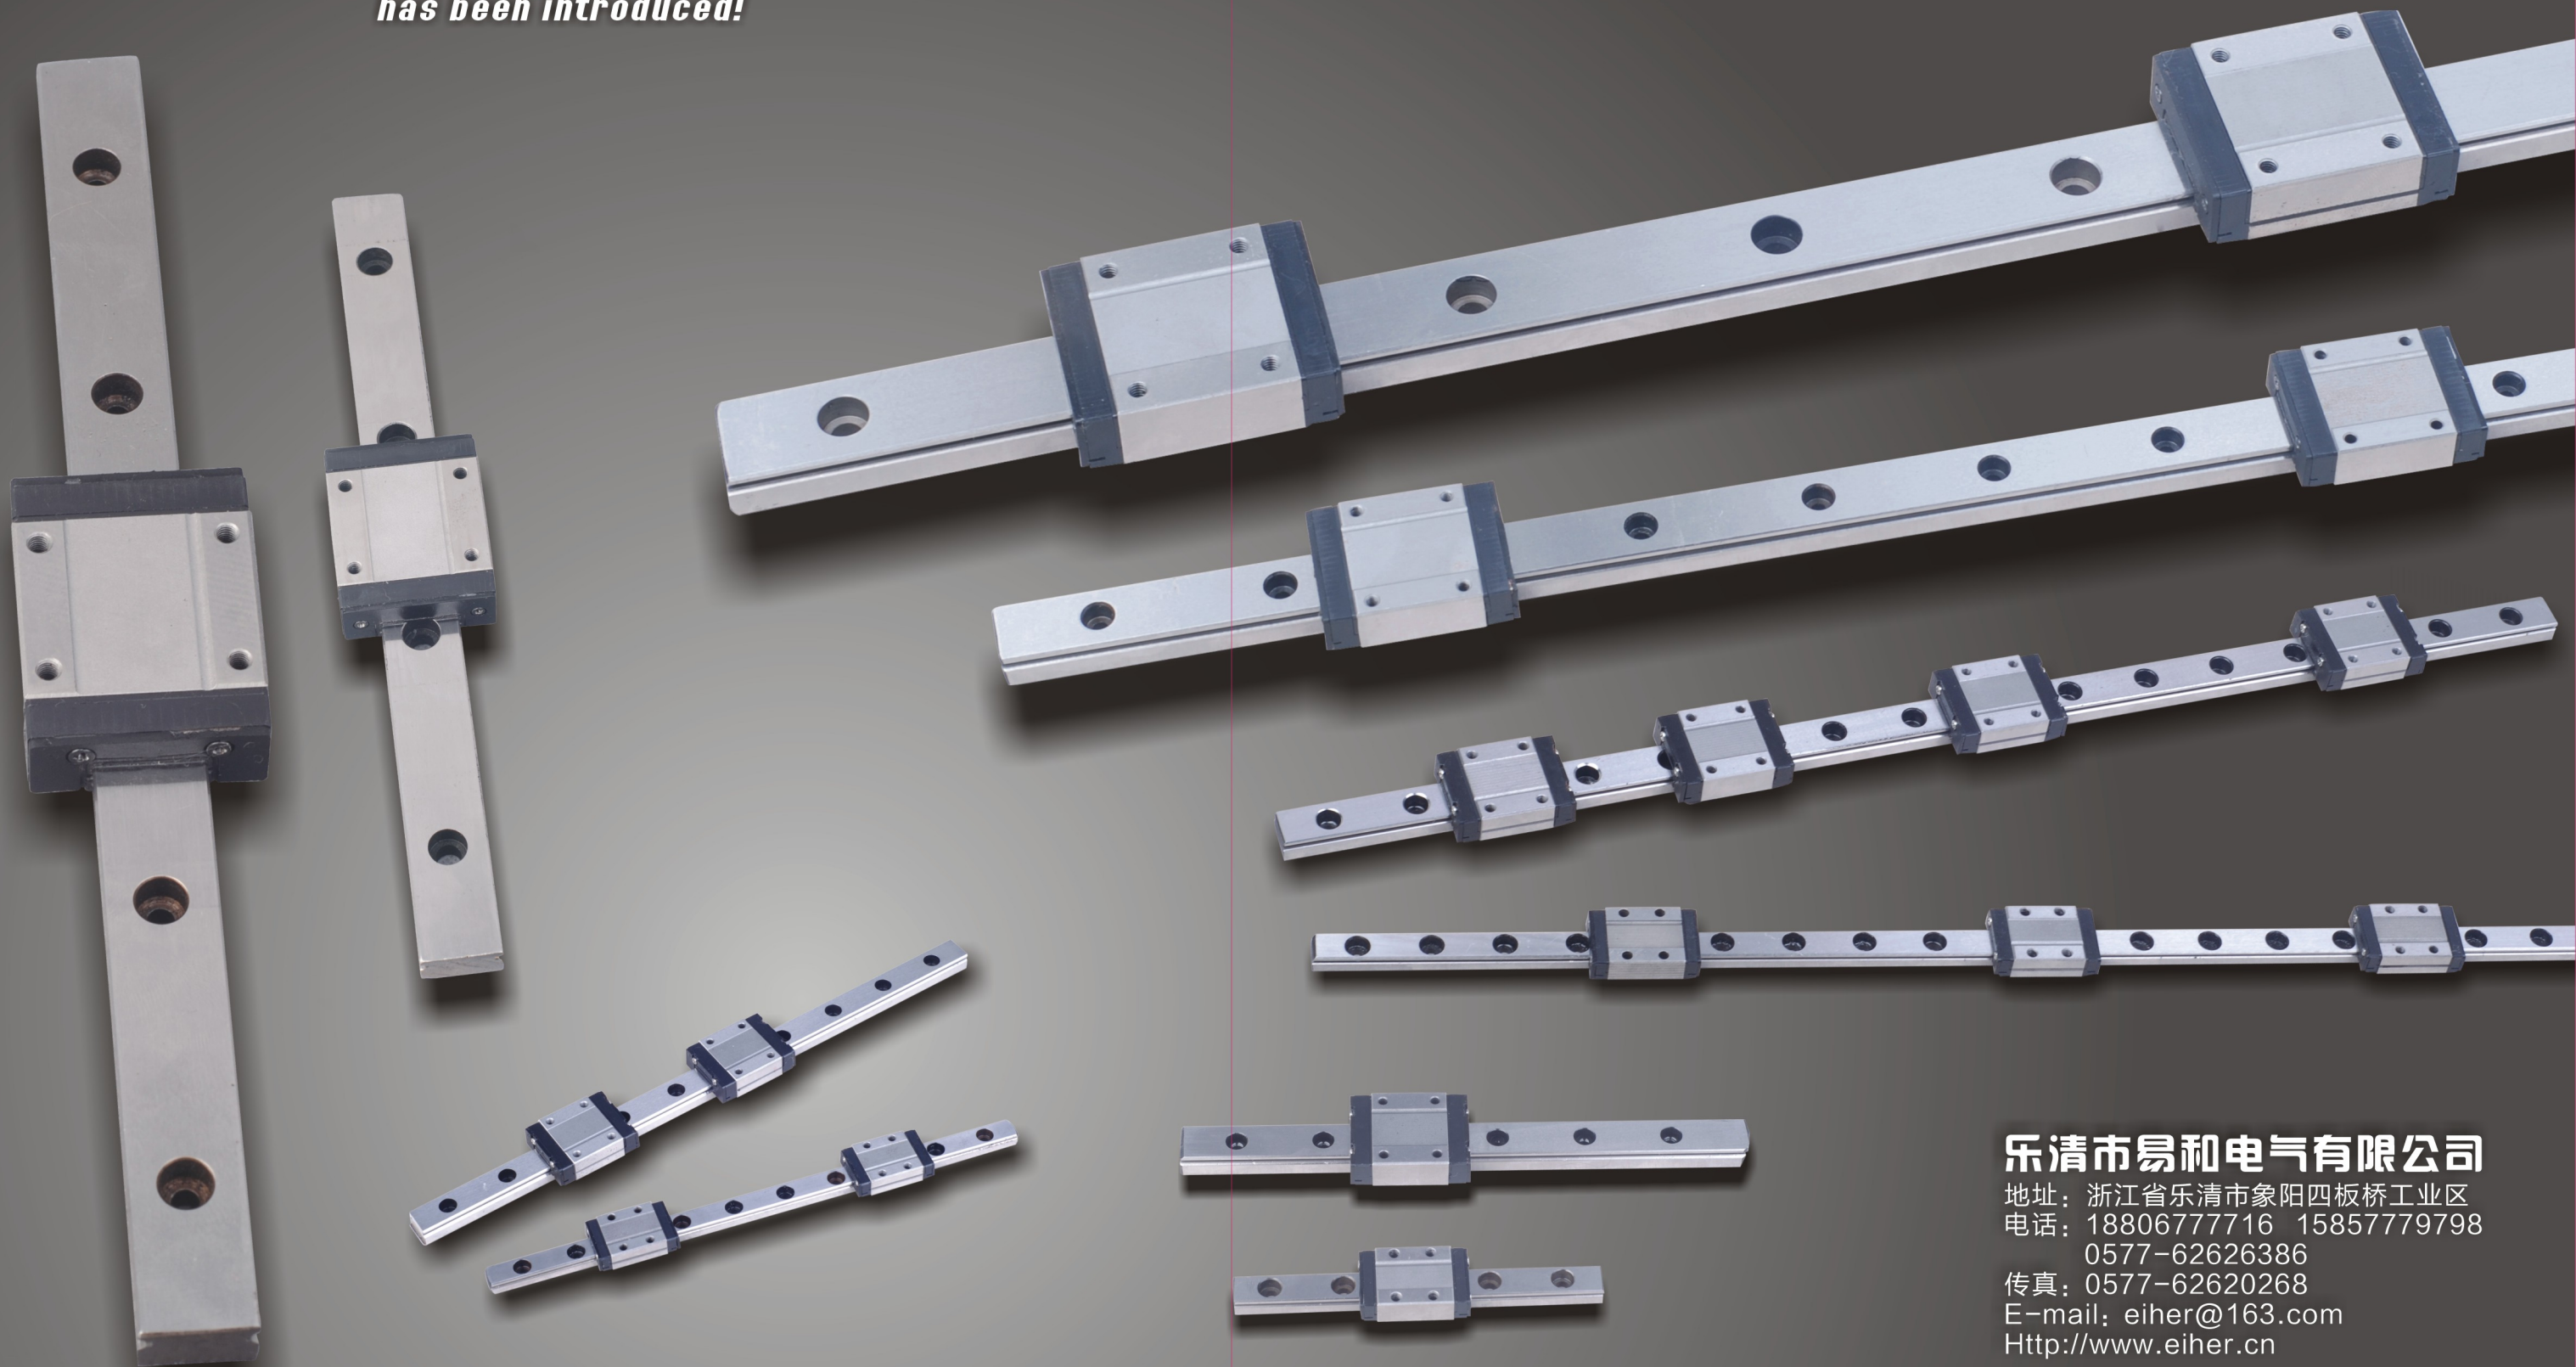

乐清市易和电气有限公司

地址：浙江省乐清市象阳四板桥工业区

电话：18806777716 15857779798

0577-62626386

传真：0577-62620268



E-mail: eiher@163.com

Http://www.eiher.cn

EIHE®


线型滑轨L:标准型

LWLC,LWL,LWLG

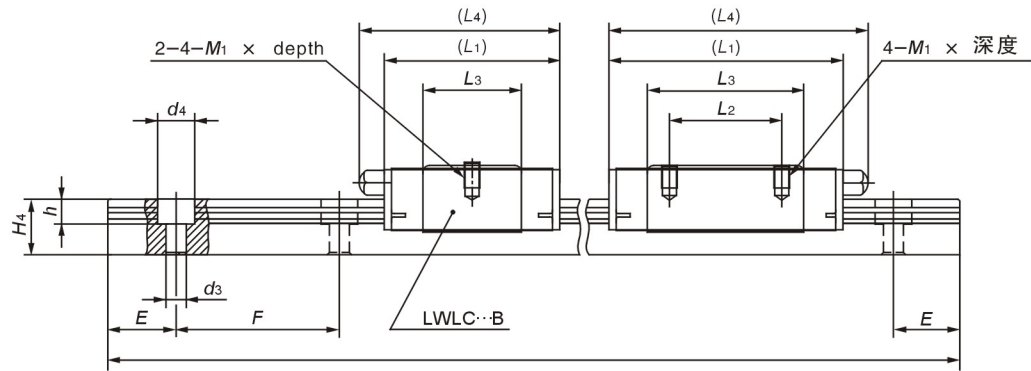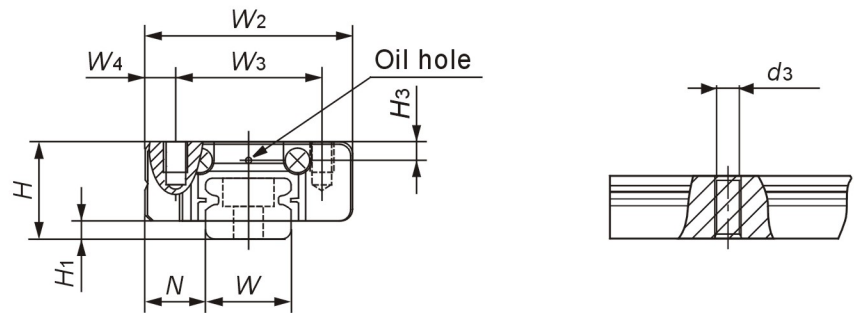

型号	重量(g)		组装尺寸(mm)			滑块尺寸(mm)								滑轨尺寸(mm)							滑轨安装螺栓 螺栓尺寸X长度 (mm)	标准动态负荷 C N	标准静态负荷 Co N	静态瞬间扭矩										
	滑 块	滑 轨	H	H ₁	N	W ₁	W ₂	W ₃	L ₁	L ₂	L ₃	L ₄	M4 × depth	H ₃	W	H ₄	d ₃	d ₄	h	E				F	To N-m	Tx N-m	Ty N-m							
LWLC9...B	11	35	10	2	5.5	20	15	2.5	21.5	—	11.9	—	M3 × 3	2.2	9	6	3.5	6	3.5	10	20	Hexagon socket head bolt M3 × 8	1 070	1 540	7.2	3.0 22.2	2.5 18.6							
LWLC9...N		37							M4 Through	—	—	(not appended) ⁽²⁾																						
LWL 9...B	19	35							30	10	20.8	—					3.5	6	3.5			Hexagon socket head bolt M3 × 8	1 610	2 860	13.3	9.4 53.0	7.9 44.5							
LWL 9...N		37															M4 Through	—	—			(not appended) ⁽²⁾												
LWL 9...BCS	28	35							40.5	15	30.9	—					3.5	6	3.5			Hexagon socket head bolt M3 × 8	2 080	4 180	19.4	19.4 102	16.3 85.6							
LWLG9...B		37															M4 Through	—	—			(not appended) ⁽²⁾												
LWLG9...N																																		
LWLC 12...B	22	65	13	3	7.5	27	20	3.5	25	—	13	—	M3 × 3.5	27	12	8	3.5	6.5	4.5	12.5	25	M3 × 8	2 000	2 470	15.3	5.5 43.3	4.7 36.3							
LWL 12...B	35								34	15	21.6												2 960	4 450	27.6	16.0 96.6	13.4 81.1							
LWL 12...BCS									44	20	32												3 780	6 430	39.9	31.8 174	26.7 146							
LWLG 12...B	51																						5 750	10 100	77.7	66.2 351	26.7 146							
LWLC 15...B	42	107	16	4	8.5	32	25	3.5	32	—	17.7	36	M3 × 4	3.1	15	10	3.5	6.5	4.5	20	40	M3 × 10	3 120	4 040	31.1	12.1 87.6	10.2 73.5							
LWL 15...B	64								42	20	27.8	47											4 390	6 730	51.8	30.8 178	25.9 149							
LWL 15...BCS									57	25	42.7	62											5 750	10 100	77.7	66.2 351	55.6 294							
LWLG 15...B	95																						5 750	10 100	77.7	66.2 351	55.6 294							
LWLC 20...B	89	156	20	5	10	40	30	5	38	—	22.3	42	M3 × 6	4.2	20	11	6	9.5	5.5	30	60	M5 × 14	4 070	5 490	56	20.2 138	16.9 116							
LWL 20...B	13								50	25	34.6	55											5 830	9 420	96.1	54.6 291	45.8 244							
LWL 20...BCS									68	30	52.3	72											5 830	9 420	96.1	54.6 291	45.8 244							
	196																						7 350	13 300	136	106 549	88.9 461							

注：标准动态负荷C，标志静态负荷Co，静态瞬间扭矩，To、Tx、Ty的方向，显示下列草图。
上面Tx、Ty适用于一列华东单元，低下的值适用于两列滑动单元。

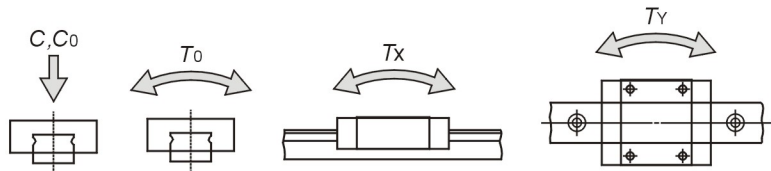

型号定义:

